

Open Voice Intercom

DOOR
1

ROOM
10

LEF & MYW-P1L



- Single PanTilt door & two or more video monitors
- Electronic tone call-in
- Door selection & reply from any LEF station
- Handsfree video monitoring



MK-DBC
Video door station



MYW-P1L
Single PanTilt door adaptor



MYH-CU & LEF-10
Video monitor &
10-call master

• Options



EL-9S
Door release
→ P.97





RY-PA
Relay for door release



MYW-BA
Long distance adaptor
→ P.33


Communication network & wiring

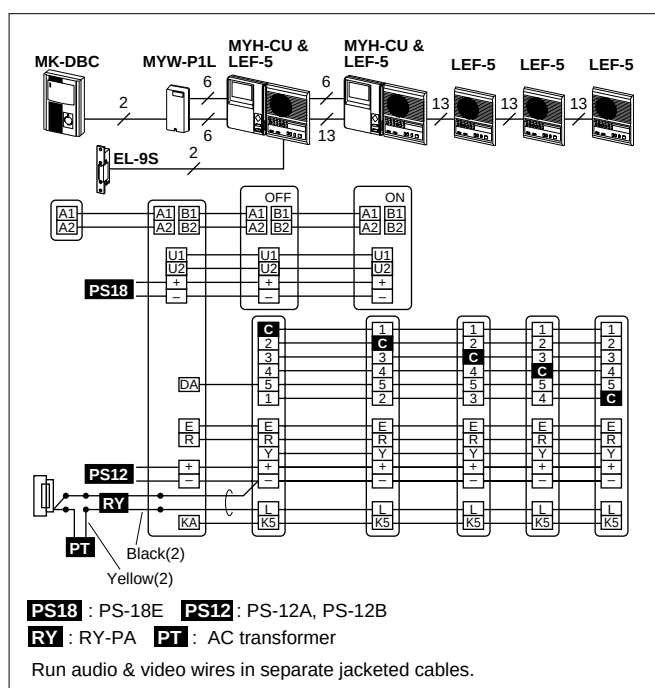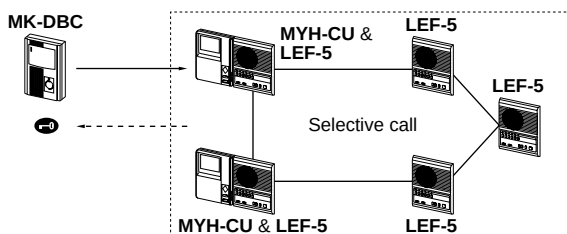


System components

- MYW-P1L**: Single PanTilt door adaptor
- MK-DBC**: Video door station (any MY, MK Series)
- MYH-CU**: Video monitor
- LEF-5, 10, 10S**: 5 & 10-call master.
- MYH-CUB**: Video monitor, semiflush mount.
- LEF-5C & 10C**: 5 & 10-call master.
- Add-on monitors MYH-CU w/add'l power supply (2 to 4 max.). Remove + wire between blocks.
- LEF-3, 3C: Intercom only.

MYW-P1L



MYH-CU



Specifications (MYW-P1L)

Power source	18V DC, 500mA. 100mA standby. MYH-CU: 0.4A. 0A standby.	
Power supply	PS-18E (video)	
Communication	Door calls in w/tone & LED, 20 sec. Image 45 sec. timed. Depress a lit selector button. Press TALK button to reply. Communication times out 2-1/2 min. Press MONITOR button to recycle.	
Wiring	2 parallel wires to door, non-polarized. 6 wires in loop, MYW-P1L to monitors. 6 wires, MYW-P1L to LEF	
Distance	0.65mmø	1.0mmø
• MYW-P1L to door	50m	100m
• MYW-P1L to MYH1	35m	75m
• MYW-P1L to MYH2	17m	35m