



## UT-2


The UT-2 operates as an electrical converter between RS232 and RS485 communication interfaces. It can be used for programming of single access controller or the whole network (subsystem) of access controllers connected RS485 bus. UT-2 device enables bidirectional data transmission between access control devices and management software installed at PC.



### Application:

- Configuration and communication within RACS 4 access control system
- Universal RS232-RS485 converter for general applications by third parties
- Integration of RACS 4 system with Integra alarm modules (Satel)

### UT-2 view and dimensions

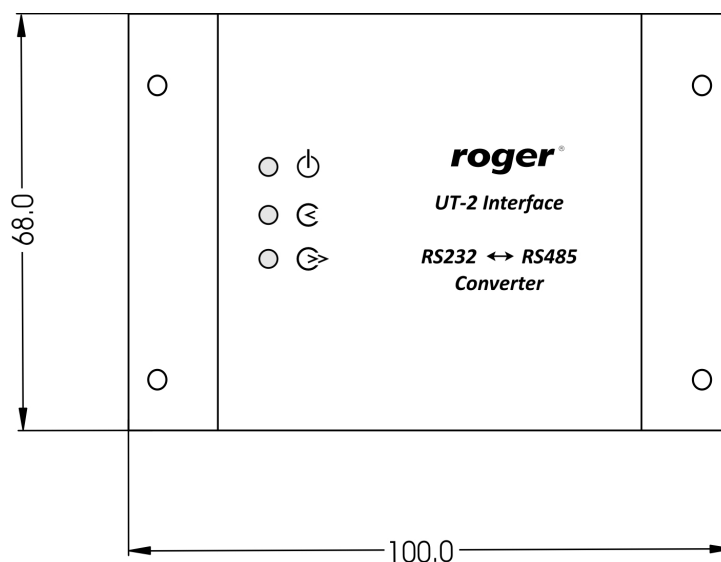

Available versions and symbols	
Symbol	Description
<b>UT-2</b>	Standard version

Technical Specification	
Parameter	Value
<b>Power supply</b>	10...15VDC
<b>Average current consumption</b>	60mA
<b>Maximum current consumption</b>	150mA
<b>Operating temp. range</b>	0-55°C
<b>Relative humidity</b>	10 to 95% (non-condensing)
<b>Dimensions</b>	100 x 68 x 35 mm (WxHxD)
<b>Weight</b>	≈80g
<b>Certificates</b>	CE

ROGER sp.j  
Gościszewo 59  
82-400 Sztum  
Poland

**T.** +48 55 272 0132  
**F.** +48 55 272 0133  
**E.** roger@roger.pl  
**I.** www.roger.pl