

# FT200 Series

# OT Systems

## 10-bit Digital 2-ch Video




The FT200 series supports optical transmission of high-quality 10-bit PCM coded video through one fiber either in multimode or singlemode.

It provides a cost-effective solution for the transmission of two-channel video. Either standalone or card module is available for different installation requirements.

### Features

- Two-channel non-compressed 10-bit digital video transmission
- No video degradation over max. operating distance
- Signal to noise ratio better than 65 dB
- Supports NTSC, PAL & SECAM video systems
- Gold plated BNC connector
- Laser diode for optical transmission
- Optimum sensitivity for power budget concerns
- Excellent suppression of EMI & RFI and elimination of ground loop
- Adjustment and maintenance free
- No setup just plug-and-play
- Hot-swappable card modules
- Duplicated LED indicators on the front and rear of the unit for the convenience of observation
- Transient voltage protection on power supply and all signal inputs & outputs
- Robust design for harsh environment applications
- Standalone or card module

### Typical Application

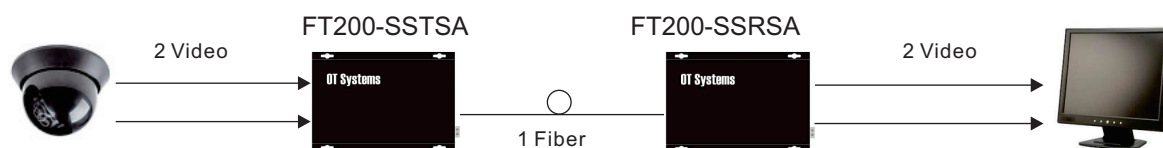

# FT200 Series

## Ordering Information

Model	Description	No. of Fibers (Wavelengths)	Optical Power Budget	Max. Distance
MULTIMODE (62.5/125 um)				
FT200-SMT FT200-SMR	2 Video Transmitter 2 Video Receiver	1 (1310 nm)	23 dB	2 km
SINGLEMODE (9/125 um)				
FT200-SST FT200-SSR	2 Video Transmitter 2 Video Receiver	1 (1310 nm)	17 dB	40 km
FT200-SSTL FT200-SSRL	2 Video Transmitter 2 Video Receiver	1 (1310 nm)	24 dB	60 km
Accessories:	FT-C18. 19” rack mount chassis (purchased separately) for housing card modules			
Options:	FT-PA/12V. 12VDC power adapter included for standalone (US, European, UK or Australian power plug)			
	Model numbers specified above are for Card Modules, please add ‘SA’ for Standalone. eg. FT200-SMT <b>SA</b>			
	ST type connector is standard. For FC type, specify ‘F’ in the model number. Eg. FT200- <b>FMT</b>			

NOTES: (1) Transmission distance will suffer if additional losses are introduced by the optical connectors, fusions, splices and the fibers within the network.  
(2) Operating distance of multimode is limited by the characteristics of the fiber bandwidth.  
(3) Power adaptor is manufactured by third party and is supplied with fitted screw-terminal output cables.  
(4) Please feel free to consult factory for any special requirement and customization.

## Specifications

Video		Electrical and Mechanical	
No. of Channels:	2	Power:	SA: 12VDC @ 4.2W Card: From FT-C18 chassis
Bandwidth:	≥6MHz per channel	Dimensions (WxHxD):	SA: 156 x 30.5 x 223mm (Max) Card: 148 x 20.4 x 213mm (Max)
Format:	PAL / NTSC / SECAM	Weight:	SA: 0.56kg Card type: 0.2kg
Input / Output:	1.0 Vp-p, 75 ohms	No. of rack slots:	1
Differential Gain:	< 1% typical	LED Indicators:	Power, Video per channel, Optical carrier detected
Differential Phase:	< 1° typical	<b>Environmental</b>	
Signal-to-Noise Ratio:	> 65dB	Operating Temp.:	-40°C to +75°C
<b>Connectors</b>		Storage Temp.:	-40°C to +85°C
Optical:	ST (standard), FC	Relative Humidity:	0 to 95% non-condensing
Video:	BNC	MTBF:	> 100,000 hours
Power:	SA: 2-pin screw terminal Card: Futurebus connector		



**Lifetime  
Warranty**