

ROOM
8

- Surface & semiflush video monitors.



MYH-CUB & LEF-10C
Video monitor & 10-call master

MYW-P3L
3 PanTilt door adaptor



BG-10C
All Call/Music/
Chime adaptor



EL-9S
Door release
→ P.97



RY-PA
Relay for
door release


MYW-BA
Long distance adaptor
→ P.33

System components

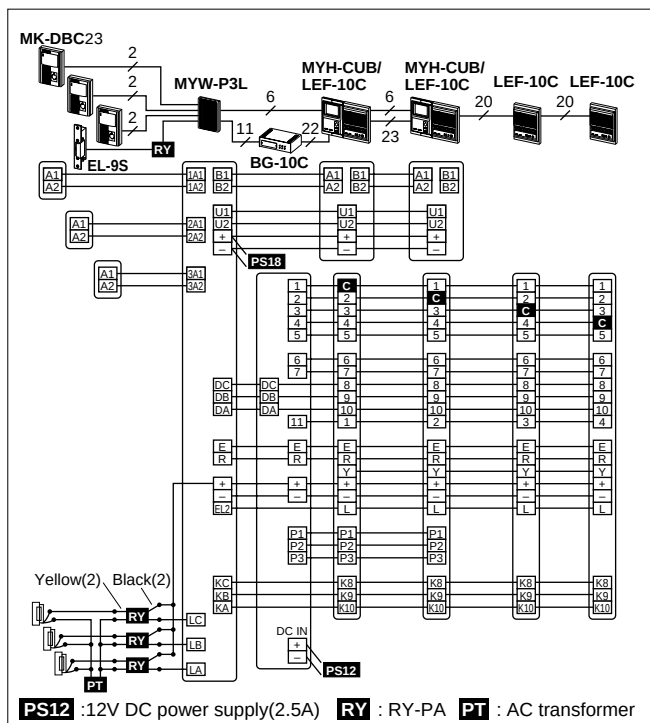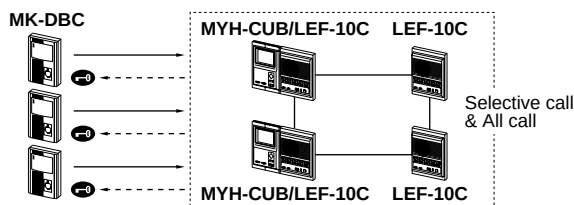

System components

- MYW-P3L:** 3 PanTilt door adaptor
MK-DBC: Video door station (any MY, MK Series)
MYH-CU: Video monitor
LEF-3, 5, 10, 10S: 3, 5, 10-call master.
MYH-CUB: Video monitor, semiflush mount.
LEF-3C, 5C & 10C: 10-call master.
BG-10C: All Call/Music/Chime adaptor.
- Add-on monitors MYH-CU w/add'l power supply (2 to 4 max.).
 Remove + wire between blocks.
 - LEF-3, 3C: Intercom only.

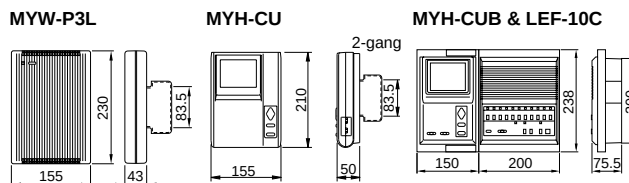

Specifications (MYW-P3L)

Power source	MYW-P3L: 18V DC, 0.6A. MYH-CU: 0.4A. 0A standby.	
Power supply	PS-18E.	
PanTilt door capacity	3	
Door release	3, channel controlled.	
Image control	KA-KC to K10-K8, activated by selector button #10-8 (chime receive via DA to DC).	
Wiring	2 parallel wires to door, non-polarized. 6 wires, in loop, MYW-P3L to monitors.	
Distance	0.65mmø	1.0mmø
• MYW-P3L to door	50m	100m
• MYW-P3L to MYH1	35m	75m
• MYW-P3L to MYH2	17m	35m