

Video Sentry

DOOR
1

ROOM
2

MK-1MD/A



- Wide-angle vision
- Camera angle can be upwardly fixed by 14°
- Add-on monitor or intercom sub station
- Handsfree audio/video monitoring of door

MONOCHROME
WIDE ANGLE



MK-DS/A
Video door station
→ P.30



Boxed set
MKS-1E/A 120V AC (with PS-18YC/A)
MKS-1E/A 220-240V AC (with PS-18YE)



MK-1MD/A
Master station
(also used as second master station)



MK-1SD/B
Audio sub station

Options



KC-32EU
Picture memory unit
→ P.32



MYW-BA
Long distance adaptor
→ P.33



IER-2
Call extension
→ P.96




KAW-D 30° Angle Box → P.33

EL-9S Door release → P.97

MCW-S Desk-top stand → P.33

AUDIO / VIDEO ENTRY SECURITY

Communication network & wiring

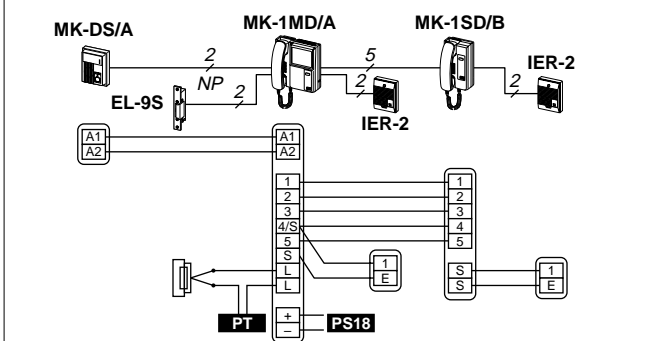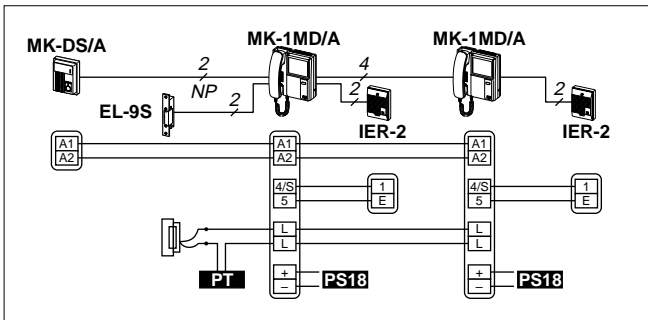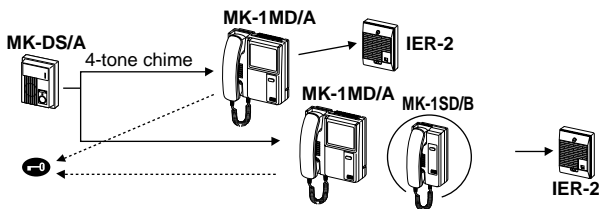


PS18 : PS-18YC/A, PS-18YE

PT : AC transformer


System components

MKS-1E/A: Boxed set of MK-1MD/A, MK-DS/A & PS-18YC/A
MKS-1E/A: Boxed set of MK-1MD/A, MK-DS/A & PS-18YE
MK-1MD/A: Master station, also used as second master station
MK-1SD/B: Audio sub station
18V DC power supply: PS-18YC/A, PS-18YE


MK-DS/A



MK-1MD/A



MK-1SD/B



Specifications (MK-1MD/A)

Power source	18V DC, 0.8A. 0.04A standby	
Power supply	PS-18YC/A, PS-18YE	
Scanning line	525 lines	
Communication	Door calls in w/4-tone chime and image, 45 sec. timed. Pick up (either) handset to reply, 2-1/2 min. timed. Inside stations can not call each other.	
Image view area	70cm vert., 100cm horiz. at 50cm from camera	
Minimum illumination	1 Lux at 50cm	
Door release	Contact rating: 12V AC, 400mA	
Wiring	2 parallel wires, non-polarized to door. 5 wires, to audio sub	
Distance	0.65mmø	1.0mmø
• Door to MK-1MD/A1-2	50m	100m
• MK-1MD/A to MK-1SD/B	50m	100m