


Video Sentry PanTilt



MY-1CD



- Single PanTilt door and monitor system w/access control
- Handsfree video monitoring
- Door release, PanTilt, Backlight & Monitor controls

MONOCHROME

PANTILT

New

MK-DAC
Video door station
→ P.29

MY-1CD
Master station


Options

KC-32EU
Picture memory unit
→ P.32

MYW-BA
Long distance
adaptor → P.33

KAW-D 30° Angle box
EL-9S Door release
→ P.97
IER-2 Call extension
→ P.96



Communication network & wiring

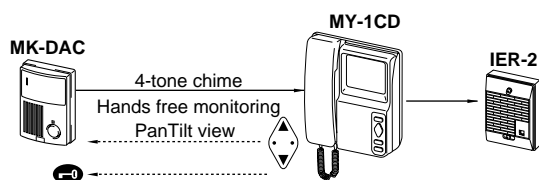

System components

MY-1CD: Master station
MK-DAC: Video door station (any MY series: MY-DS, MK-DS/A, etc.)
18V DC power supply: PS-18YC/A, PS-18YE

MY-1CD

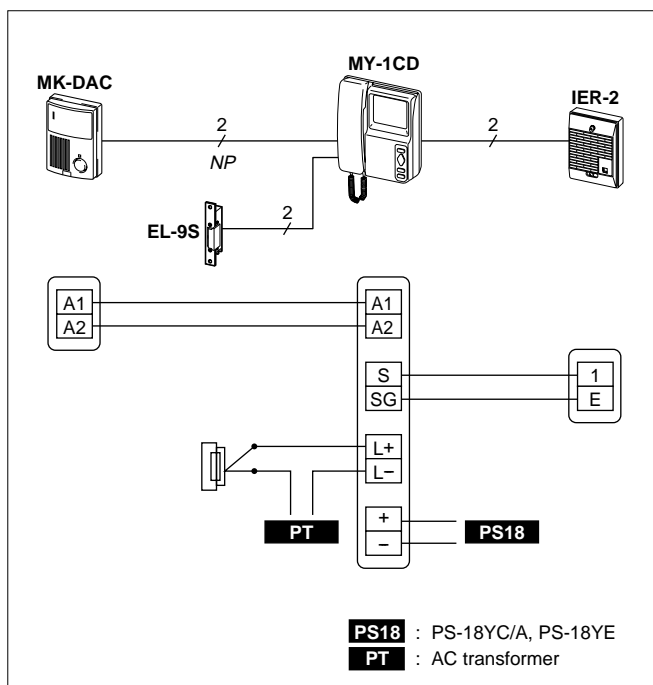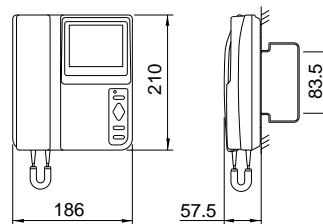

Specifications (MY-1CD)

Power source	18V DC, 900mA. 40mA standby	
Power supply	PS-18YC/A, PS-18YE	
Video monitor	4" direct view flat CRT	
Scanning line	525 lines	
Communication	Door calls in w/4-tone chime 45 sec. timed. Lift handset to reply 2-1/2 min. timed. Turn image on/off with MONITOR.	
Image timer	45 sec. (call-in) 2-1/2 min. (communication)	
Wiring	2 parallel wires, non-polarized	
Distance	0.65mmø	1.0mmø
• MY-1CD to door	50m	100m