


Classic Swipe Wiegand Reader

The Classic Swipe Wiegand Reader is synonymous with the Wiegand technology. It is molded of rugged, high impact plastic to resist vandals and epoxy potted to seal out moisture. The Classic Swipe Wiegand reader features a bi-color LED. It is immune to external magnetic fields and RF signals.

Used in applications throughout the world, the Classic Swipe Wiegand reader is the workhorse of Wiegand access control.



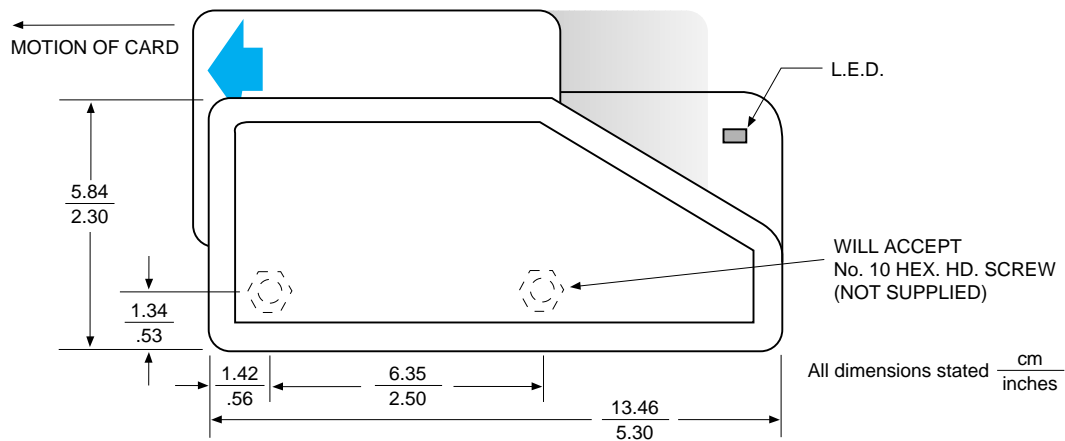

Specifications

For use with code strip layout options:

- A long edge/right side
- A1 long edge/left side
- D short edge

Input power:

5-12 VDC

Current:

40mA (typical)

Dimensions:

2.3" x 5.3" x 1.7"
(5.8 x 13.46 x 4.3 cm)

Slot width:

0.062" to 0.069"
(1.6 mm to 1.75 mm)

Operating temperature:

-40° F to 160° F (-40° C to 70° C)

Operating Humidity:

10 to 95%

Weight:

12.1 oz. (343 gm)

Material:

Long-wearing polymeric plastic

Certifications:

UL 294 listed
CE Mark approved

Cable distance:

500 feet (150 m) using shielded 22 AWG cable

Features

Mounting: The Classic Swipe reader is back-mounted on a vertical surface, with slot orientation either upward, downward or facing to the left or right.

Visual indication: When a Wiegand card is swiped through the reader, the red LED flashes to green to indicate a proper read. Rejected cards are indicated with an amber color.

Indoor / outdoor design: The Classic Swipe Wiegand reader is sealed in a rugged, potted, weatherized polymeric enclosure to withstand harsh environments and provide a high degree of vandal resistance.

Warranty: Classic Swipe Wiegand readers are warranted against defects in materials and workmanship for life from date of shipment. (See complete warranty policy for details.)

Part Number

Base Part No.: 310

Description: Bi-color LED

- Options:
- Colors (Black or Beige)
 - Termination (6' cable or barrier strip)
 - Labels (Black or Custom)

(Please see "How to Order" guide for a description of the options and associated part numbers.)

Specifications subject to change without notice.

LITCSWPDS 8/97

Printed in the U.S.A.

© HID Corporation, 1997



333 State Street, North Haven, Connecticut 06473 U.S.A.
Tel: (203) 287-9000 (800) 243-2563 Fax: (203) 407-5967
Internet Address: <http://www.prox.com>