


## Securitex Kocom intercom division



**KDP-605 Combine door phone**

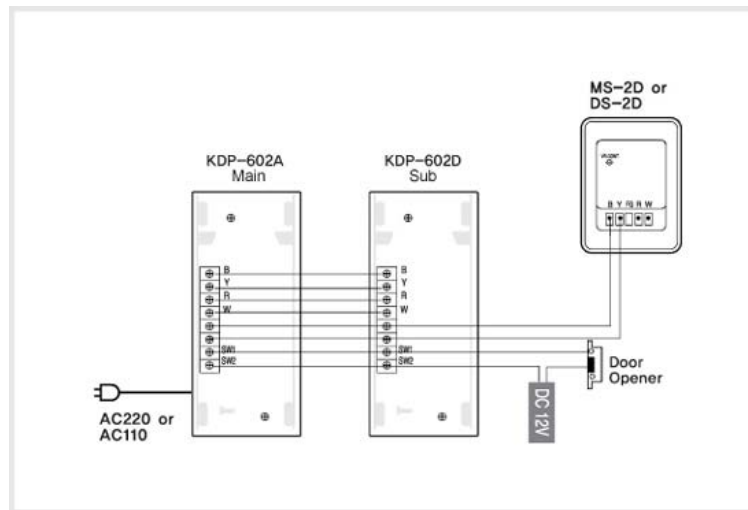

**KDP-602AD wiring diagram**

Can be used with direct interphone and doorphone  
 Differentiated call signal to rooms and door station  
 Used: home, office, apartment, factory, hospital, etc.

Can be combined with door opener

Can be used 1:1 interphone

Item	Specification
Power	AC 110V or 220V
Power consumption	Un load : 1.3W, In load : 4W
Signal Sound	From door : Chime / From indoor : Electronic chime
Wiring	Door : 2Wired Room : 6Wired
Range	KDP-602A ~ KDP-602D : 30m / KDP-602A/D ~ MS-2D or DS-2D : 50m

**Marketed and distributed by**

Securitex Electronic Systems Engineering  
 Block 9010 Tampines Street 93 #04-145 Singapore 528844 Tel: 65-67852171 Fax: 65-67863351  
<http://www.securitex.com.sg>