Securitex Day Night camera for PTZ application

The most reliable and stable camera ever been develop. This camera produce extremely clear vibrant colour image in day and B/W image in the night.

Side View	Rear View

Model	Securitex-CNB-A1263PL
Signal System	PAL : 625 Lines
Scanning System	2:1 Interlace
Scanning Frequency (H)	15.625 KHz
Scanning Frequency (V)	50 Hz
Image Sensor	1/4 inch SONY Super HAD CCD
Total Pixels No.	795 (H) x 596 (V) 470K
Effective Pixels No.	752 (H) x 582 (V) 440K
Video S/N Ratio	More than 48dB (AGC Off)
Horizontal Resolution	480 TV Lines
Video Output Level	1.0 Vp-p (75 Ω, Composite)
Lens	22x Optical Zoom (F 1.6, f=3.9 ~ 85.8mm) Video AF
Digital Zoom	10x (Total Zoom Ratio: 220x), 2x ~ 10x Variable
Sensitivity	0.001 Lux (DSS)
Camera Control	Rear Button, RS-485 (Pelco-D) / PTZ Controller Interface
OSD (On Screen Display)	On/Off
Focus Mode	Auto / Manual
Digital Slow Shutter	Off / 2 FLD ~ 128 FLD Mode
Electronic Shutter	1/50 ~ 1/10,000 sec.
Input/Output Connector	Control: 5 Pin Terminal, Power: 2 Pin Terminal, Video: BNC
Supplied Voltage	DC 9V ~ 15V (Recommendation DC12±0.5V)
Power Consumption	Max. 5.4W / 450mA
Dimensions	58(W) x 58(H) x 103.4(D) mm
Weight	Approx. 300g (Camera only)

Securitex-CNB-A1263PL camera in Pan/tilt Dome housing c/w Multi-protocol telemetry board. This PTZ camera is gear driven and do not use belt.
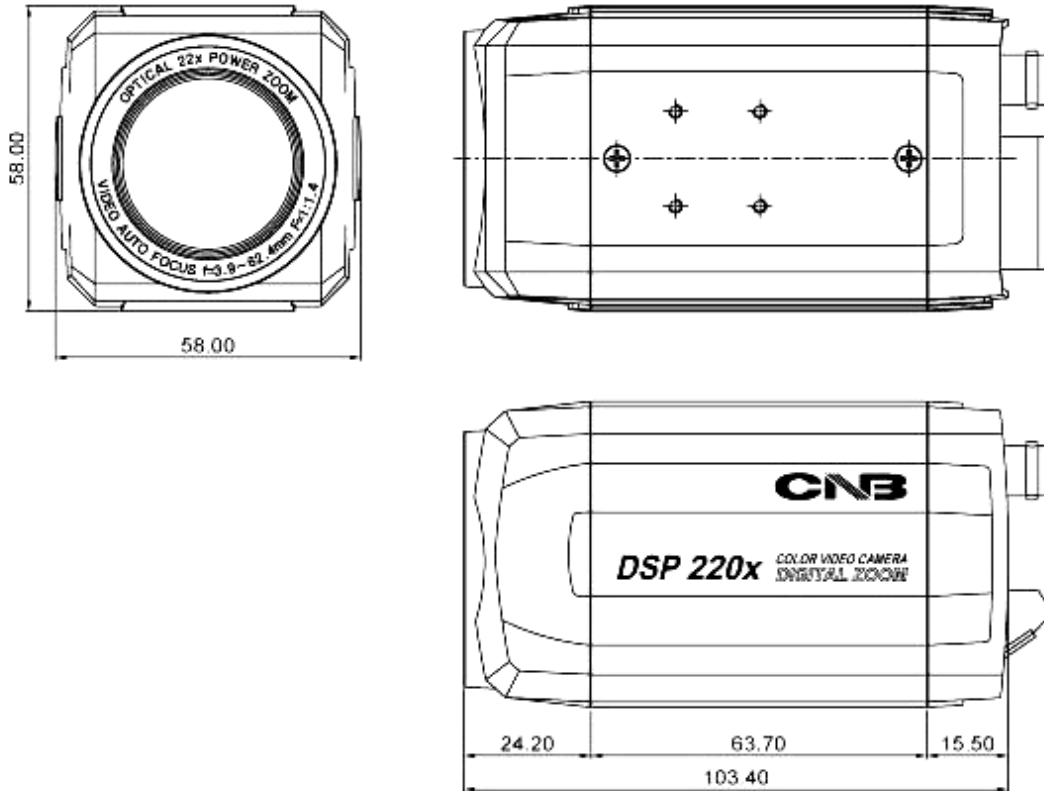
We specialized in design, supply and install extremely high end enterprise CCTV system for Oil, Gas, Chemical, Aviation, Pharmaceutical, Military, Correctional, super tankers, ocean liners and vessel etc.

Securitex Day Night camera for PTZ application

The most reliable and stable camera ever been develop. This camera produce extremely clear vibrant colour image in day and B/W image in the night.

DIMENSIONS

58.00

58.00

OPTICAL 22x POWER ZOOM
VIDEO AUTO FOCUS f=3.9~82.4mm F=1:1.4

CNB

DSP 220x COLOR VIDEO CAMERA DIGITAL ZOOM

24.20   63.70   15.50

103.40

Securitex Multi-protocol keyboard for controlling the Securitex-CNB-A1263PL camera

The Securitex Multi-protocol keyboard can control up to 256 Pelco P and Pelco D protocol PTZ camera. The super wide screen c/w 4 lines display, 2 dimension joystick with patrol path setting and LCD back light. Input voltage 12VDC controlling 1024 Channels. Communication RS-485 and power consumption 8W. This keyboard works extremely well with:
Securitex Multi-Protocol PTZ board PCB485-SQ1

Model: Securitex MPKB-A1.256CH

Digital Video recording PTZ feature

As most Digital Video recording software c/w PTZ control, thus as long as this software can control Pelco P or Pelco D protocol camera, they will be able to control Securitex-CNB-A1263PL camera

Note:
The above camera, its rear connection and dimension are only presentation / illustration and may vary from the actual camera.

Note: Due to constant product development all system supply by Securitex, we reserve the rights to change the designed and specification without prior notice.

We specialized in design, supply and install extremely high end enterprise CCTV system for Oil, Gas, Chemical, Aviation, Pharmaceutical, Military, Correctional, super tankers, ocean liners and vessel etc.