




Handsfree type Home Videophone



New



Diagram

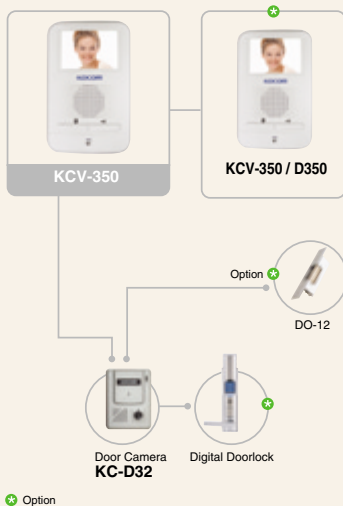

[DO-12] Electric Door Opener

- Voltage : DC 12V-from extra power source
- Max Current : Less 300mA
- Consumption : 3W
- Close-Strain intensity : Less 300mA
- Open-Strain Intensity : Less 3Kg (DC 12V/300mg)
- Material : Roller : Al Die Casting

[KCV-350 / D350]

- 3.5" TFT LCD color handsfree VDP
- Compact size & convenient design
- Audio + video conversation with visitor
- Door open function
- Door release from camera (KC-D32, metal pinhole camera)
- Upto 2 monitors & 1 camera connection
- KCV-350 : AC Type, KCV-D350 : DC type

Specifications

Model no.	KCV-350	KCV-D350
Power	SMPS AC100V ~ AC240V	DC17V / AC24V (Dual voltage)
Power consumption	Max. 10W, Stand by 1W	
Assurance temperature	0°C ~ +50°C	
Communication systems	One way hands free conversation	
TFT LCD	3.5" Color TFT LCD	
Wiring	4wires in polarity	
Max. wiring distance	φ0.65 single cable : 50m, 5C-2V coaxial cable : 100m	
Mount type	Surface mount	
Dimension (mm)	112(W) x 176(H) x 43(D)	
Weight (approx. kg)	1.2kgs	
Camera connection	KC-D32 (metal pinhole camera, door release from camera)	

• The product may include option or additional functions.