



Multiple Doorphone




■ KDP-205



■ KLP-1000

Diagram

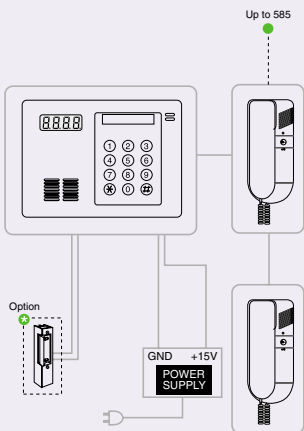

[Power Supply]

- PS-M2 (15V)
- Input : AC 100V~130V or 220V~240V
- Output : DC 16.5V / 1A±2V

[KDP-205]

- For multi apartment, condominium & villa system, upto 585 houses are available
- Audio conversation with visitor
- Door open (common gate) function
- Call & conversation function with guard (KLP-1000)

[KLP-1000]

- Door open function by access code
- Firm metal body case with new modern design
- Upto 2pcs of common gate panel connection in a building

Specifications

Model no.	KDP-205	KLP-1000
Power	DC 15V (±1V) powered from common power supply	
Power consumption	Max. 0.2W, Stand by 0W	Max. 3W, Stand by 0.3W
Assurance temperature	0°C ~ +50°C	-20°C ~ +50°C
Wiring	3wires (common wiring)	
Max. wiring distance	∅0.8 single cable : 300m, 5C-2V coaxial cable : 500m	
Mount type	Surface	Surface & Flush mount
Dimension (mm)	92(W) x 210(H) x 57(D)	210(W) x 182(H) x 25(D)
Weight (Approx. kg)	0.5kgs	1.0kgs

• The product may include option or additional functions.