



STM 1205



STM 1210



STM 1215

technical specification

model:STM 1205

input voltage	220Vac - 240Vac
	1 phase 50Hz
no. of battery	1 x 12Vdc
charging current	max 5Amp (low & high select)
safety protection	input fuse 2Amp, output auto fuse 7.5Amp
dimension (h x w x d)	(120x 180x 210)mm
weight	3.5kg

model:STM 1210


input voltage	220Vac - 240Vac
	1 phase 50Hz
no. of battery	1 x 12Vdc
charging current	max 10Amp (low & high select)
safety protection	input fuse 2Amp, output auto fuse 15Amp
dimension (h x w x d)	(120 x 180 x 210)mm
weight	5.0kg

model:STM 1215

input voltage	220Vac - 240Vac
	1 phase 50Hz
no. of battery	1 x 12Vdc
charging current	max 15Amp (low & high select)
safety protection	input fuse 2Amp, output MCB 16Amp
dimension (h x w x d)	(130 x 180 x 200)mm
weight	6.0kg

dimensions

model:STM 1205 / STM 1210

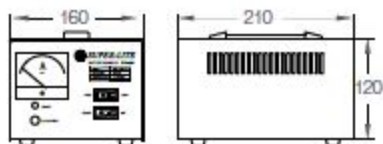

model:STM 1215

