





MULTI - FUNCTION EXTENSION MODULE

MDDIDO MODULES



SYRIS MDDIDO - 1S Module

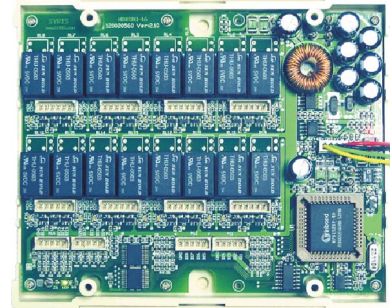

SYRIS MDDIDO - 16 Module

SPECIFICATION

Items / Specs	MDDIDO - 1S
Interface	RS485 format
Baud rate	19,200bps (4,800 、 9,600 、 19,200 、 38,400 、 57,600 、 115,200)
ID	1 to 8 or 01 to 99
Input	4 voltage free
Output	2 relay output
Indicator	3 LED
Color	Beige
Operating temperature	-20 °C to 70 °C
Storage temperature	-30 °C to 80 °C
Power supply input	8V to 15V DC
Dimensions (mm)	75 W x 115 H x 15 D
Items / Specs	MDDIDO - 16
Interface	RS485 format
Baud rate*	19,200bps (4,800 、 9,600 、 19,200 、 38,400 、 57,600 、 115,200)
ID	1 to 8 or 01 to 99
Input	16 voltage free
Output	16 relay output
Indicator	3 LED
Color	Beige
Operating temperature	-20 °C to 70 °C
Storage temperature	-30 °C to 80 °C
Power supply input	8V to 15V DC
Dimensions (mm)	107 W x 138 H x 30 D

*This specification is preliminary and subject to change without prior notice.