

radius



PRT62LT

Each PRT62LT reader can be used as an universal identification point connected to the access controller.


PRT62LT readers can operate in many common communication standards (e.g. Wiegand, Mag-stripe, Clock and Data, RACS), so they can cooperate with majority of controllers from different vendors available on the market.



Features:

- EM 125 kHz cards
- Programmable data output format
- Formats: Wiegand 26-66 bits, Magstripe (Clock and data), RACS (Roger) and other
- Various ways of PIN and keypad codes transmission
- LED and Buzzer controlled through separate inputs
- Tamper
- CE mark

PRT62LT views and installation diagram

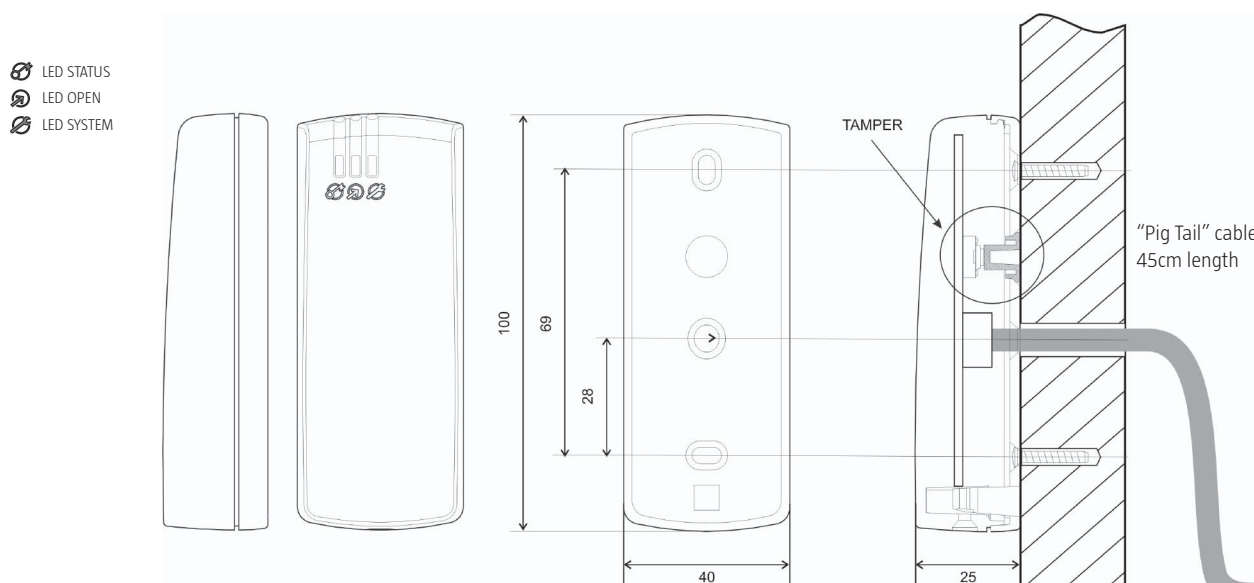

Available versions and symbols

Symbol	Description
PRT62LT-G	Dark grey case
PRT62LT-L	Light grey case
PRT62LT-S	Silver-metallic case

Technical Specification

Parameter	Value
Supply voltage	10-15 VDC
Current consumption (average)	45mA
Anti-sabotage protection (Tamper)	NC contact, 50mA/24V, IP67
Reading distance	Up to 12 cm
Environmental class	Class IV, outdoor-general, temperature: -25°C +60°C, relative humidity: 10 to 95% (non condensing)
Dimensions H x W x D	100 X 40 X 25 mm
Weight	≈100g
Approvals	CE

ROGER sp.j
Gościszewo 59
82-400 Sztum
Poland

T. +48 55 272 0132
F. +48 55 272 0133
E. roger@roger.pl
I. www.roger.pl

roger®