

901 housing with 200mm sun shield



Accessories

600DER infra red mounting plate

600/RuP quick release plate

Bracket with fixed pan & tilt adjuster

Sombrero bracket Stetson bracket

Rigid, yet light and stylish


Fez column spacers Strong, lightweight Without pan & tilt adjuster


With fixed pan & tilt adjuster

Dual process heat treated gravity die cast aluminium construction


CersAvailable in any lengthveightHigh tensile extruded aluminium construction



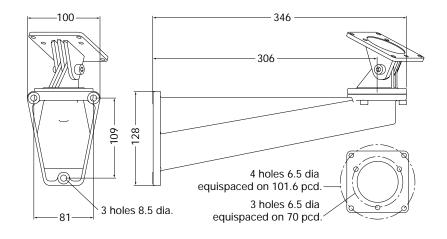

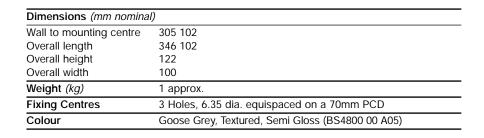

Dimensions (mm nominal)			
Wall to mounting centre	306		
Overall length	346		
Overall height	182		
Overall width	100		
Weight (kg)	1.2 Approx		
Fixing Centres	3 Holes, 6.35 dia. equispaced on a 70mm PCD		
	Plus 4 Holes, 6.35 dia. equispaced on a 101.6mm (4") PCD		
Angles (°)	Pan 360		
	Tilt -80 to +25		
Colour	Goose Grey, Textured, Semi Gloss (BS4800 00 A05)		



4 Holes, 6.35mm on

available on request


Goose Grey, Textured, Semi Gloss (BS4800 00 A05)

PCD's and combinations

101.6 (4") PCD

150, 225, 300

	$\sim \circ \sim$		
	fl 44		
6	\square		
0	\uparrow	0	
	\smile	/ fl 115	
	\sim	/	



Metham Aviation Design Limited Station Approach, Four Marks, Alton Hampshire GU34 5HN, UK

Standard PCD's

Colour

Standard Lengths (mm)

Non Standard Lengths

Tel: +44 (0)1420 565618. Fax: +44 (0)1420 565628 Email: info@madcctv.com Web: www.madcctv.com

MAD pursues a policy of continuous development. Specifications may therefore be changed without notice.



Stetson bracket without pan & tilt adjuster



Sombrero bracket with fixed pan & tilt adjuster



Fez column spacers

